


○ **Fluorescent penetrant testing unit**

- It is designed to be able to perform a test process efficiently, in the case of inspecting large quantity of parts with Fluorescent penetrant by a few people.
- Unit can be selected in accordance with the size of the part to be inspected.

MA -1

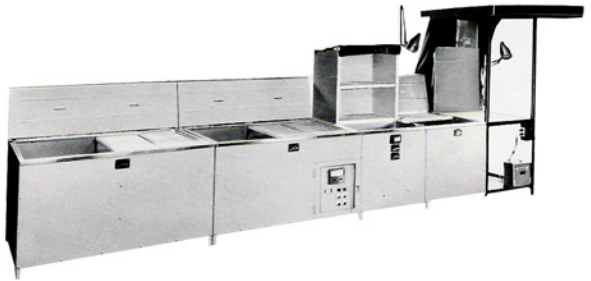

○ **No-Draining PT unit**

**(PT unit using solvent remover)**

- Because washing drainage is not given, drainage facilities are not necessary.
- Process ability of test line improves remarkably without dry process bottlenecking.
- Easy automatization.

MH -1




○ **Recycle PT unit**

**(PT unit using recycle washing water)**

- Drainage processing facilities are not necessary.
- Washing water shall be recycled.

RP -1

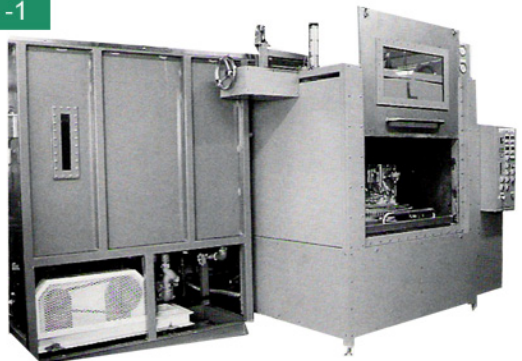

○ **Penetrantion time**

Material	Form	Deect	Time(min)
Al, Mg, Cu, Ti, Steel	Casing Welding	Crack, Improper welding, Porosity	5
	Casing Rolling	Crack, Overlapping	10
Carbide tip tool		Crack, Improper welding, Porosity	10
Ceramic, Glass, Plastic	All	Crack	5